AZTECH LABS, INC.

SOUND GALAXY BX II EXTRA/BX III

Card Type	Sound card
Chipset Controller	Aztech
I/O Options	Audio out, CD audio in, game/MIDI port, line in, microphone in, speaker connector, volume
Maximum DRAM	N/A
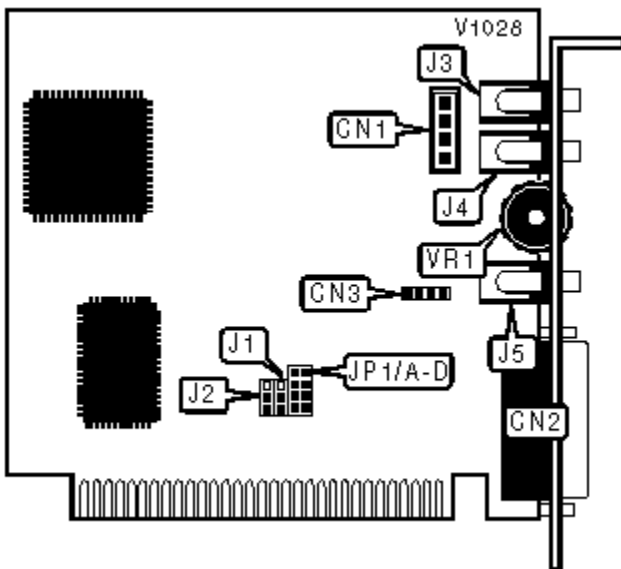
CONNECTIONS			
Purpose	**Location**	**Purpose**	**Location**
CD audio in	CN1	Microphone in	J4
Game/MIDI port	CN2	Audio out	J5
MPC speaker connector	CN3	Volume	VR1
Line in	J3		

BASE I/O ADDRESS SELECTION

Address	J1
220h	Pins 1 & 2 closed
240h	Pins 2 & 3 closed

» (default for 220h)

GAME PORT CONFIGURATION

Setting	J2
Enabled	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed

» (default for Enabled)

INTERRUPT SELECTION

IRQ	JP1/A	JP1/B	JP1/C	JP1/D
7	Closed	Open	Open	Open
2	Open	Open	Open	Closed
3	Open	Open	Closed	Open
5	Open	Closed	Open	Open

» (default for IRQ 7)

Note: » is default